

YAMAHA'S latest addition to the SCARA Robot family: YK-TW Orbit Type

NEW YK350TW
YK500TW



**Superior Positioning Accuracy
and High Speed**

Ceiling-mount configuration allows 360 ° arm rotation
Smaller footprint, no dead space in work envelope

NEW YK350TW



YK500TW







Advantages of YK-TW Series SCARA robot over conventional SCARA and parallel-link robots.

Layout Design Freedom


User: We want a smaller equipment footprint.

YK-TW can move anywhere through the full ϕ 1000 mm² work envelope.

Featuring a ceiling-mount configuration with a wide arm rotation angle, the YK-TW can access any point within the full ϕ 1000 mm downward range. This eliminates all motion-related restrictions with regard to pallet and conveyor placement operations, while dramatically reducing the equipment footprint.

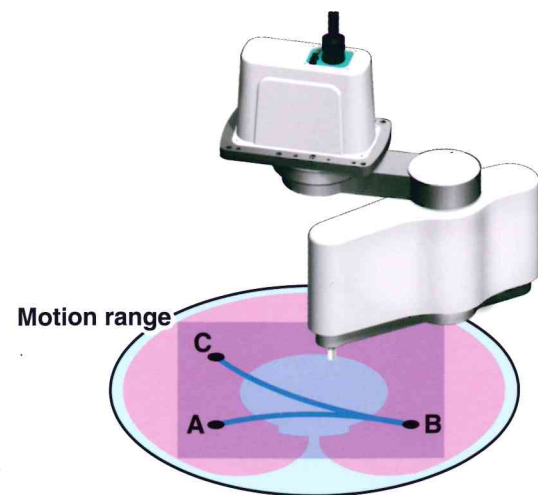

Orbit type SCARA robot



Standard type SCARA robot

Higher Productivity

User: We need to reduce cycle time.

Standard cycle time of 0.29 secs.^{*2}

Y-axis (arm 2) passes beneath the X-axis (arm 1) and it has a horizontal articulated structure, allowing it to move along the optimal path between points. Moreover, the optimized weight balance of the internal components reduces the cycle time by 36 % as compared to previous models.



Cycle time


The standard cycle time for moving a 1-kg load horizontally 300 mm and up/down 25 mm is shortened by approximately 36 % compared to existing YAMAHA models.

High Quality

User: We want a high precision assembly system.

YK-TW offers a repeated positioning accuracy of ± 0.01 mm^{*1} (XY axes).

Higher repeated positioning accuracy than that offered by a parallel-link robot. This was accomplished by optimizing the robot's weight balance through an extensive re-design of its internal construction. The lightweight yet highly rigid arm has also been fitted with optimally tuned motors to enable high accuracy positioning.

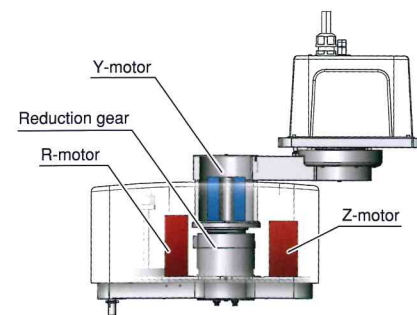

Hollow construction

Y-motor and reduction gear feature a hollow construction which allows them to be housed inside the harness arm.

360° Rotation.

Optimized rotation center of gravity moment

Weight balance was optimized by placing the R-motor and Z-motor at the left and right sides respectively.

Reduced inertia enables high-speed motion.

Suitable for a Wide range of Applications

User: We need to move heavy workpieces at high speeds.

YK-TW handles payloads up to 5 kg.


Handles loads up to 5 kg. Also accommodates arm-end tools which tend to be heavy, making it highly adaptable to various applications.

Smaller Equipment Footprint

User: We want to reduce the height of our equipment.

YK-TW offers both a lower height and a smaller footprint.

YK-TW height is only 392 mm. This compact size enables more freedom in the equipment layout design.

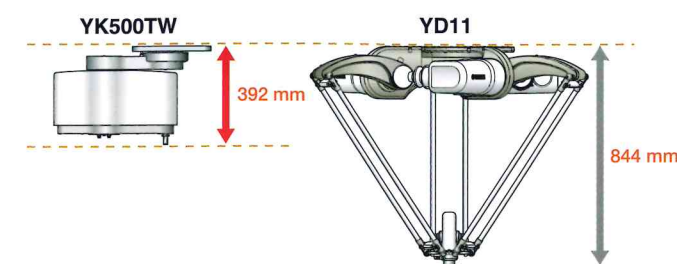

*1. Applies to the YK350TW *2. Applies to the YK500TW

Easy Installation

User: Parallel-link robots require large frames which complicates installation...

YK-TW has a total height of only 392 mm, and weighs only 27 kg².

Lower inertia = Lighter frame



An optional dedicated installation frame is available for the YK-TW. For details, contact a YAMAHA sales representative.

Environment Resistant

User: Operating equipment in (harsh) environments is our concern...

YK-TW features the same type of resolver as those used in hybrid automobiles and aircraft.

Resolver is a magnetic position sensor. It features a simple construction with no electronic or optical parts, making it far less susceptible to failure than conventional optical encoders. It is this superior environment resistance and low failure rate that makes it reliable enough for use in many fields such as hybrid automobiles and aircraft, etc., where reliability is essential.



Ordering method

YK350TW YK500TW	130				RCX340-4 ^{Note}								
Model	Z axis stroke 130: 130mm	Tool flange No entry: None F: With tool flange	Hollow shaft No entry: None S: With hollow shaft	Cable 3L: 3.5m 5L: 5m 10L: 10m	Controller / Number of controllable axes	Safety standard	Option A (OP.A)	Option B (OP.B)	Option C (OP.C)	Option D (OP.D)	Option E (OP.E)	Absolute battery	
					RCX240		R3						BB
					Controller	CE Marking	Regenerative unit	Expansion I/O	Network I/O	IVY System	Gripper	Battery	
RCX240 / RCX340 : Specify desired controller option setting.													▶ P.6,7

Specifications

		YK350TW	YK500TW
Axis specifications	X-axis	Arm length	175 mm
		Rotation angle	$\pm 225^\circ$
	Y-axis	Arm length	175 mm
		Rotation angle	$\pm 225^\circ$
	Z-axis	Stroke	130 mm
AC servo motor output	X-axis / Y-axis / Z-axis / R-axis		750 W / 400 W / 200 W / 105 W
	Deceleration mechanism		Harmonic drive / Harmonic drive / Ball screw / Belt speed reduction
Repeatability ^{Note 1}	XY axes	± 0.01 mm	± 0.015 mm
	Z-axis	± 0.01 mm	$\pm 0.01^\circ$
Maximum speed	XY axes synthesis	5.6 m/sec	6.8 m/sec
	Z-axis	1.5 m/sec	3000 °/sec
Maximum payload ^{Note 2}		5 kg	5 kg (RCX340) / 4 kg (RCX240)
	Standard cycle time ^{Note 3}	0.32 sec (RCX340) / 0.38 sec (RCX240)	0.29 sec
R-axis tolerable moment of inertia ^{Note 4}	Rated		0.005 kgm ²
	Maximum		0.05 kgm ²
User wiring			0.15 sq x 8 wires
User tubing (Outer diameter)		$\phi 6 \times 2$	$\phi 4 \times 2$
Travel limit		1.Soft limit 2.Mechanical stopper (X,Y,Z axis)	
Robot cable length		Standard: 3.5 m Option: 5 m, 10 m	
Weight		26 kg	27 kg

Note 1. In constant ambient temperature.


Note 2. Tool flange specifications (optional) apply to the YK350TW (4 kg) and the YK500TW (RCX340: 4 kg / RCX240: 3 kg).

Note 3. When moving a 1 kg load back and forth 300 mm horizontally and 25 mm vertically (rough positioning arch motion).

Note 4. May need to limit parameters (such as acceleration) according to the moment of inertia being used.


* The recommended positional relationships regarding the center of the load weight (center of gravity position) and the offset amount from the R-axis center are shown in the graph below.

R-axis moment of inertia (load inertia)




* Applies only to the YK350TW. When the payload exceeds 4kg, R-axis moment of inertia may exceed the rated value. In such case proper parameter adjustment is required.

Controller ordering method

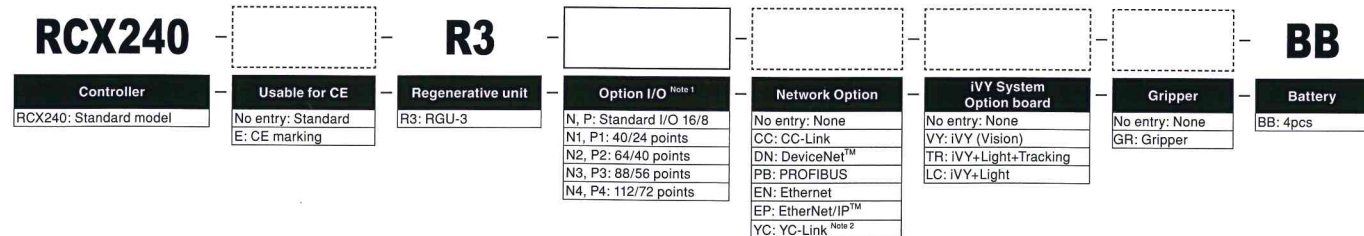

Note 1. Use N to N4 when NPN is selected on the I/O board, and P to P4 when PNP is selected.

Note 2. Available only for the master.
(The YC-Link system controls an SR1 series single-axis controller in accordance with communications received from an RCX series multi-axis controller. Using the YC-Link system allows control of up to 8 axes (or up to 6 axes with synchronous control)).

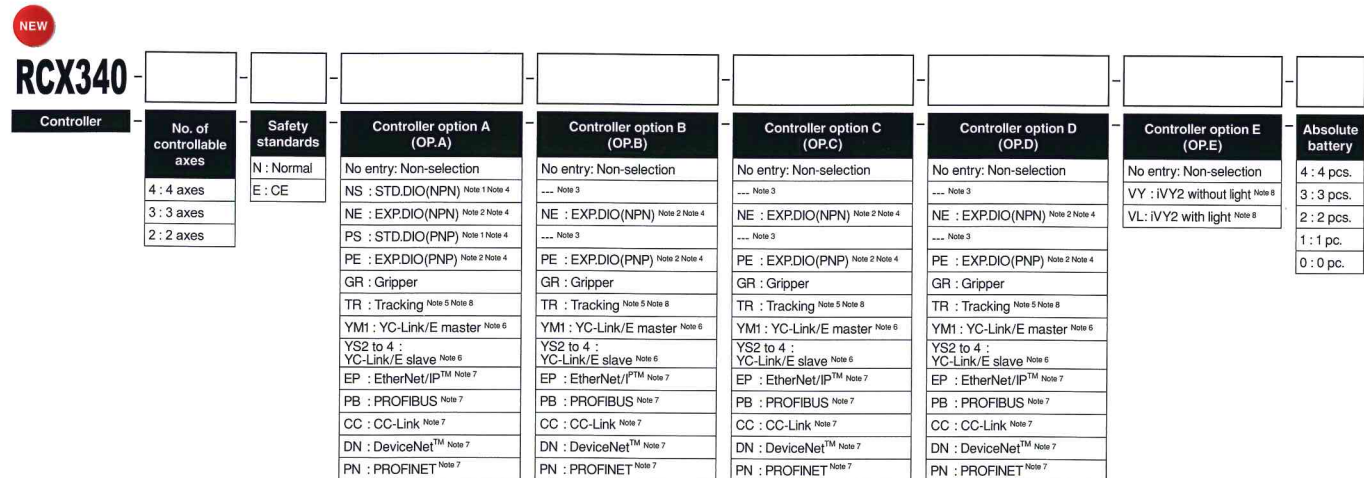

Please select desired option from the above controller option A in order of listing.

Note 1. [STD.DIO] Parallel I/O board standard specifications
Dedicated input 8 points, dedicated output 9 points, general-purpose input 16 points, general-purpose output 8 points
Do not mix with field bus (CC/DN/PB/EP).

Note 2. [EXP.DIO] Parallel I/O board expansion specifications
General-purpose input 24 points, general-purpose output 16 points

Note 3. Only one DIO STD specification board can be selected. Therefore, this board cannot be selected in OP.B to OP.D.


Note 4. Do not mix NPN and PNP of DIO.

Note 5. Only one tracking board can be selected.


Note 6. Select only one master or slave board for YC-Link/E.
For details, see the "YC-Link/E ordering explanation" given below.
Additionally, when ordering YC-Link/E, please specify what robot is connected to what number controller.
Do not mix field buses (CC/DN/PB/EP/PN).

Note 7. EtherNet/IP™ Note 7


Note 8. Tracking + IVY2: Please consult YAMAHA representative for availability.

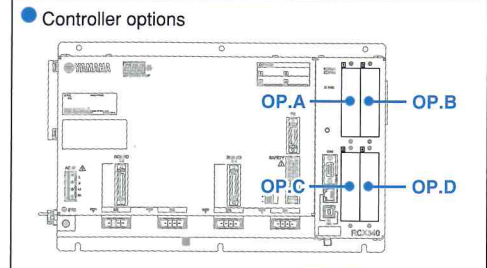


RCX340 YC-Link/E ordering method

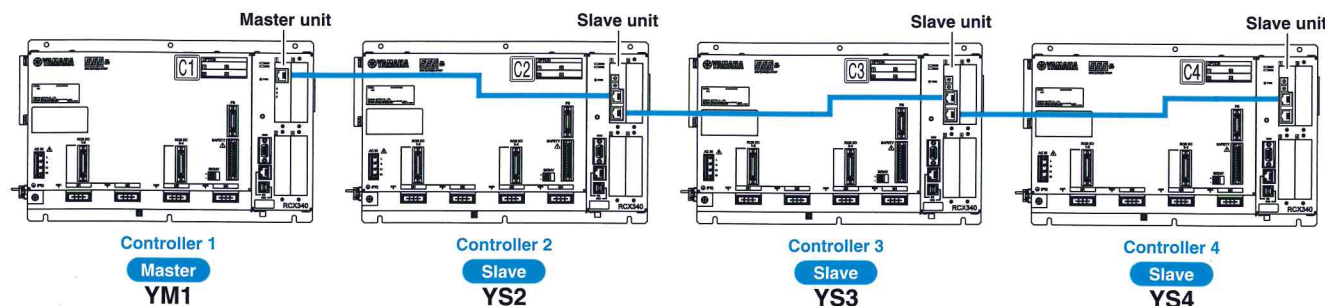

External view of RCX240

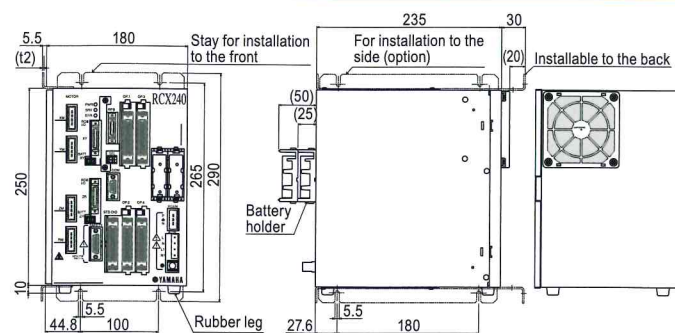

External view of RCX340

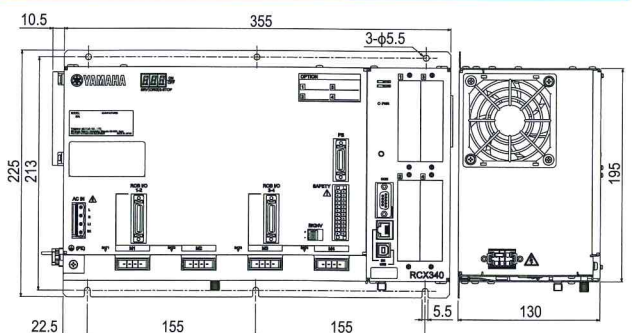

Controller basic specifications

Item		RCX240	RCX340
Basic specifications	Connected motor capacity	1600 W or less (in total for 4 axes)	
	Power capacity	2500 VA	
	Dimensions	W 180 × H 250 × D 235mm (main unit only)	W 355 × H 195 × D 130mm (main unit only)
	Weight	6.5 kg (main unit only)	6.2 kg (main unit only)
Axis control	Power supply voltage	Single-phase 200 to 230 V AC +/-10 % maximum, 50/60 Hz	
	No. of controllable axes	The max. 4 axes (or 4 axes with simultaneous control)	The max. 4 axes (or 6 axes with simultaneous control) controller link allows an expansion to a max. of 16 axes (4 robots).
	Drive method	AC full digital servo	
	Position detection method	Resolver or magnetic linear scale	
	Control method	PTP motion (point to point), ARCH motion, linear interpolation, circular interpolation	
	Coordinate systems	Joint coordinates, Cartesian coordinates	
	Position display units	Pulses, mm, degree	
	Speed setting	1 to 100 % (1 % steps, This setting can be made even by programming.)	
	Acceleration/deceleration setting	Automatic acceleration setting by robot model and tip weight parameter Setting by acceleration coefficient and deceleration rate parameters (1 % steps) Can be changed by programming.	
	Zone control	(Only the SCARA robot can set an optimum speed corresponding to the arm position.)	
Program-ming	Program language	YAMAHA BASIC II conforming to JIS B8439 (SLIM language)	
	Multi-task	Max. 8 tasks	Max. 16 tasks
	Sequence program	1 program	
Memory	Memory capacity	364 KB (total capacity of program and points) (Available capacity for program when the maximum number of points is used: 84 KB)	2.1 MB (total of program and point data) (Available capacity for program when the maximum number of points is used: 300 KB)
	Program	100 programs (maximum number of programs) 9999 lines (maximum number of lines per program)	
	Point	10000 points (maximum number of points)	30000 points (maximum number of points)
	Point teaching method	MDI (coordinate data input), direct teaching, teaching playback, offline teaching (data input from external unit)	
	System backup (internal memory backup)	Lithium battery (service life about 4 years at 0 to 40 °C)	
	Internal flash memory	512 KB (ALL data only)	
	SAFETY	Input Emergency stop input, Service mode input (NPN/PNP specification is set according to STD. DIO setting) ENABLE switch input (enabled only when RPB-E is in use)	Output Emergency stop ready input, 2 systems Auto mode input, 2 systems (Applies only CE specs.) ENABLE switch input (enabled only when PBX-E is in use)
External I/O	Brake output	Relay contact	
	Origin sensor input	Connectable to 24 V DC B-contact (normally closed) sensor	
	External communications	RS-232C: 1CH (D-SUB 9-pin (female)) RS-422: 1CH (dedicated for programming box)	RS-232C: 1CH (D-SUB 9-pin (female)) Ethernet: 1CH (In conformity with IEEE802.3u/IEEE802.3) 100Mbps/10Mbps (100BASE-TX/10BASE-T) Applicable to Auto Negotiation USB: 1CH (B type) RS-422: 1CH (dedicated to PBX)
General specifications	Operating temperature	0 to 40 °C	
	Storage temperature	-10 to 65 °C	
	Operating humidity	35 to 85 % RH (no condensation)	
Options	Noise immunity	Conforms to IEC61000-4-4 Level 3	
	Protective structure	IP10	IP20
	Option slots	4 slots	
Optional boards	Parallel I/O	Standard specifications	STD.DIO : Dedicated input 10 points, dedicated output 11 points General-purpose input 16 points, general-purpose output 8 points
		Expansion specifications	Dedicated input 8 points, dedicated output 9 points General-purpose input 16 points, general-purpose output 8 points (max. 1 board, NPN/PNP specs. selection)
	Serial I/O	CC-Link	24 points general-purpose inputs per board, 16 points general-purpose outputs per board (max. 4 boards, NPN/PNP specs. compatible)
		DeviceNet™	Remote I/O Dedicated input/output: 16 points each General-purpose input/output: 96 points each
		PROFIBUS	Remote register Input/output: 16 words each
		EtherNet/IP™	
	Ethernet	Conforms to Ethernet (IEEE 802.3) 10Mbps (10BASE-T)	Standard equipment
			I/O device, 2 ports, Conformance class B, Ver. 2.2
	IVY2	Camera input (2ch), camera trigger input, PC connection input	
	Tracking	AB phase input, lighting trigger input, lighting power supply input/output	
	Lighting control	lighting trigger input, lighting power supply input/output	
Gripper control	Number of controlled axes: 1 axis per board, max. 2 boards Position detection format: Optical rotor encoder Min. setting unit: 0.01 mm		Number of controlled axes: 1 axis per board, max. 4 boards Position detection format: Optical rotor encoder Min. setting unit: 0.01 mm
	Programming box		RPB, RPB-E PBX, PBX-E
	Absolute battery		XY axes: 3.6 V, 5400 mAh (2700 mAh, 2 batteries) ZR axes: 3.6 V, 5400 mAh (2700 mAh, 2 batteries) Backup retention time: About 1 year
Regenerative unit	RGU-3		Internal (built in)
	Support software for personal computer		VIP+ RCX-Studio